


INDOOR BREAK OUT O.F. CABLE – SAUDI TELECOM (STC)

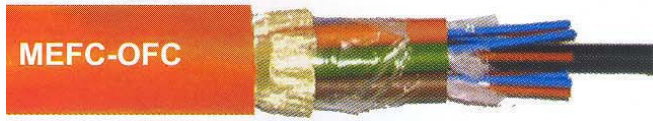

Tight Buffered Optical Fiber


Central Strength Member

Core Wrap

Sub Unit

Peripheral Strength Members

Outer Jacket

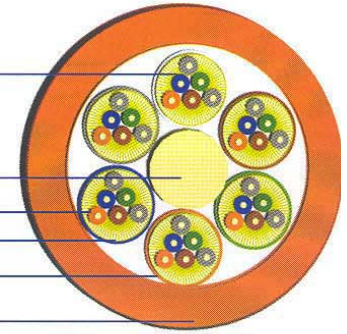

STANDARDS

Reference Standards: MAT-1602 (STC)

Fiber Specifications : Refer Page nos : 44-45

Testing Procedures : IEC-60794-1 (or) EIA/TIA-455

PERFORMANCE CHARACTERISTICS

Storage Temperature: -10 C to +70 C

Operating Temperature: -10 C to +70 C

Max Pulling Tension: 1000 Newton

ORDERING INFORMATION



INDOOR DISTRIBUTION O.F. CABLE – SAUDI TELECOM (STC)




Tight Buffer

Optical Fiber

Peripheral Strength Members

Outer Jacket



STANDARDS

Reference Standards: MAT-1602 (STC)

Fiber Specifications : Refer Page nos : 44-45

Testing Procedures : IEC-60794-1 (or) EIA/TIA-455

PERFORMANCE CHARACTERISTICS

Storage Temperature: -10 C to +70 C

Operating Temperature: -10 C to +70 C

Max Pulling Tension: 500 Newton

ORDERING INFORMATION



* Fiber Type

1. Single Mode Dispersion Unshifted Fiber (Matched Clad)
2. Single Mode Dispersion Unshifted Fiber (Depressed Clad)
3. Single Mode Dispersion Shifted Fiber
4. Single Mode NonZero Dispersion shifted Fiber
5. MM 62.5/125nm
6. MM 50/125 nm